



LF-3000 High Frequency Soldering Station

Specifications:

Input Power:
100-120Vac 60Hz
220-240Vac 50Hz

Wattage:
SIA 90 Watt
(HF-90 Replacement Iron)

Temperature Range:
100°C - 500°C / 212°F - 932°F

Heating Element:
PTC Sensor

Heat Up Time:
0-300°C ≤ 30 seconds

ESD Safe:
Zero Voltage Circuitry,
Isolated 32V Transformer
3 wire Power Ground

Housing:
Aluminum Alloy
EMI protection

Temperature Adjust Lock-Out: Yes - by Password code

Burn Resistant Cables: Yes

Warranty:
12 Months (excludes
consumption items)

For additional information or ordering assistance please call toll free 877-700-6085 to speak with a XYtronic Soldering Specialist today!



**The XYtronic LF-3000
High Frequency Soldering Station**

XYtronic Soldering Systems...

Serving the electronics industry since 1984

.....Shingle Springs, CA. XYtronic-USA is pleased to announce the arrival of the all new LF-3000 our **High Frequency, High Heat capacity soldering station** – the best solution for your soldering equipment needs. You will be more than satisfied with this station, with it's main feature bringing you fast climbing temperatures, making it highly favored for Lead Free soldering.

LF-3000 High Frequency Soldering Station		
MODEL		
Input	220-240Vac 50Hz/	100-120Vac 60Hz
Output	36Vac/90W	
Fuse (Slow type)	T1A	T2A
Temperature Range	100°C - 520°C / 212°F - 932°F	
Temperature Correction Range	+99°C - 99°C / +210°F - 212°F	
Default Set	100°C / 212°F	
	No Password	
	Temperature correction value "00"	
Dimensions	111(W) x 158(H) x 137(D) mm	
Weight (Unit Only)	2.5kg / 6.5lbs	

Key Features:

Heater / Sensor Failed Detection:
If sensor circuit fails, the heater power is shut down.

Temperature "Lock-Out" feature:
The temperature can be locked with a password code - for production line management.

High Power, Great Recovery:
With the 90W high power, great thermal recovery improves the soldering environment, It can shorten the soldering working time, which minimize concern about the influence of heat on components and tip life

Energy Saver:
If the station is set to the auto sleep function setting mode , after the station has been idle for more than 20 minutes, this new feature will automatically kick in - to decrease tip temperature and extend tip life.

Isolated Iron Holder With Tip Cleaner:
Made of low abrasive brass shavings instead of conventional sponges to meet RoHS requirement, cleans better and no water is necessary.

Low voltage Output With Safety Operation: The power unit is isolated from the A.C. line by a transformer and allows 36Vac to drive the heating element. Solder wand runs from 36 Volts for safety and with 90W high power PTC heater for a super-fast heat-up and quick temperature recovery. The solder wand is attached with heat resistant, non-burning, flexible 6-wire cord.

ESD Safe and Spike Free Circuitry: The "Zero Voltage" electronic switching design also protects voltage and current sensitive components (CMOS devices, etc.) against damaging current and transient voltage spikes commonly produced by less efficient, mechanically switched stations.


Earth Jack:
With a grounding connector, there is the possibility for a grounding of the wire strap if required.



PRODUCT DESCRIPTION

The new LF-3000 high frequency soldering station with intelligent chip microcomputer control was developed to meet the present and future Lead-free soldering needs of the electronic production industry. Suitable for work on professional SMD electronics. The ergonomic handle has a shorter distance between heating element and tip resulting in fast heat up time and quick heat compensation. High-quality sensor and heat transfer technology ensure precise temperature regulation, essential for making consistent, reliable soldered connections. The aluminum housing has the advantage of strong structure, good heat sink and a resistance to electro-magnetic interference. Our LF-3000 provides all the benefits of temperature regulation and connects via a flexible burn-resistant lead, with easy temperature adjustments.

Add to the versatility of your new Xytronic-USA LF-3000:

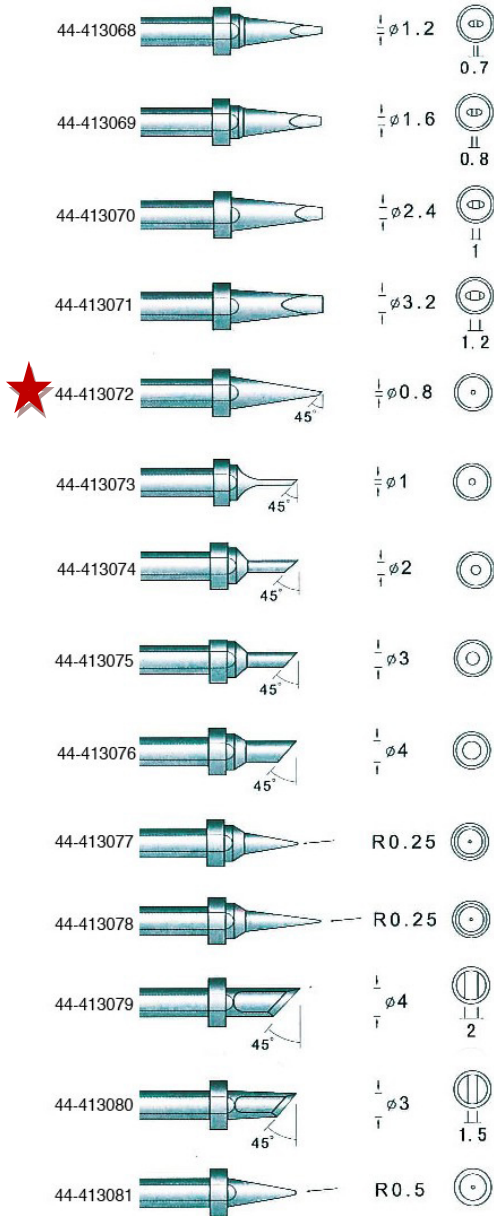

Bench top fume Extractor XY-426DLX

The Fume Extractor 426 offers a convenient and space saving method of removing noxious fumes from the work environment. Designed for use on the factory floor, in R&D or by the hobbyist, this product provides an economical and efficient method to improve the work place by reducing the possibility of headaches, nausea and eye irritations often associated with exposure to solder fumes.



Tip Cleaner XY-459

Replacement cleaner element for the 460 cleaner stand. This pad will not damage your soldering tip. No more messy sponges to deal with. The cleaner your tip the better your heat transfer. This will help increase productivity.



Magnifying Lamp

XY-JF-22CBXytronic JF-22CB, Economic Type 3X Magnifying Lamp 42" Reaching Arm. Long reach economy model with springs and stabilizers. Accepts 22 watt fluorescent tubes. 110v standard 220v available operation. Furnished with 1.8 meter cord and plug. 3X magnification.

Distributed by: